

# Linux Foundation CKA Exam Questions - Quick and Effective Way to Pass Exam

The Kubernetes Administrator CKA certification is the best way to level up your career in today's challenging information technology market. Since the CKA credential badge validates your skills and knowledge, recruiters will prefer you over your competitors during the recruitment process. Besides new jobs, success in the CKA exam is also helpful to get salary hikes and promotions within your current firm. These career benefits come after cracking the Linux Foundation Certified Kubernetes Administrator test. P2PEXams offers updated Certified Kubernetes Administrator CKA exam study material which has everything to prepare and pass the exam on the first try. This practice material comes in Kubernetes Administrator desktop practice exam software, web-based practice test, and CKA dumps PDF format. These three formats have CKA test questions that are accurate and real. Check out the features of these formats. However, passing the CKA exam is a really challenging task. But with the P2PEXams [Linux Foundation CKA Exam Questions](#), you can pass the Certified Kubernetes Administrator CKA certification exam easily.



GET A STRONG  
GRIP ON EVERY  
**EXAM**  
TOPIC WITH LATEST PDF  
**DUMPS**

**TRY NOW**

[WWW.P2PEXAMS.COM](http://WWW.P2PEXAMS.COM)

## Get Actual Linux Foundation CKA Questions in PDF To Prepare for Exam in Short Time

CKA PDF questions are 100% actual and updated. These Certified Kubernetes Administrator CKA real questions are in line with the current exam syllabus. You can open this Kubernetes Administrator CKA PDF document on laptops, tablets, and smartphones. You can use Linux Foundation CKA PDF dumps without the time and place restrictions. Our team of experts has added CKA test questions in the PDF after a thorough analysis of past papers and the exam syllabus. All questions in the Certified Kubernetes Administrator CKA PDF file appear in almost every exam. If you are under time pressure for test preparation, you can crack the Linux Foundation exam by just using these actual dumps PDFs.

**Analyze and Boost Your Preparation with the Linux Foundation CKA Practice Test**


Our Linux Foundation Kubernetes Administrator practice exam software (desktop and web-based) provides a record of your every test attempt. This feature of our practice tests enables you to identify and eliminate mistakes in your test preparation. On every CKA practice exam attempt you learn from your mistakes. Both Linux Foundation Certified Kubernetes Administrator practice exams (desktop and web-based) are customizable and create an environment that is similar to the actual exam. The Certified Kubernetes Administrator CKA desktop practice exam software works on Windows operating system only. You don't need additional plugins or software installation for the web-based Kubernetes Administrator practice exam. The web-based CKA practice exam software is compatible with all operating systems and browsers.

### **Purchase P2PEXams Linux Foundation CKA Dumps Today and Get Free Updates for 90 Days**

We will refund you as per the terms and conditions if our Linux Foundation Kubernetes Administrator real dumps don't help you crack the test. Additionally, we provide you with up to 90 days of free CKA valid dumps updates. You will receive these free Linux Foundation Certified Kubernetes Administrator actual dumps updates in case of any new exam changes. If you want to evaluate the features of CKA PDF dumps or practice exams, try our free demos. It is your golden chance to purchase updated CKA exam dumps at an affordable rate with all these amazing offers. Buy P2PEXams Updated [Linux Foundation Exam Questions](#) and start Certified Kubernetes Administrator CKA exam preparation today. Good Luck!


## Question No. 1

Score: 13%

```
Set configuration context:   
  
[student@node-1] $ | kube  
ctl config use-context w  
k8s
```

### Task

A Kubernetes worker node, named wk8s-node-0 is in state NotReady. Investigate why this is the case, and perform any appropriate steps to bring the node to a Ready state, ensuring that any changes are made permanent.

```
You can ssh to the failed   
node using:  
  
[student@node-1] $ | ssh  
wk8s-node-0  
  
You can assume elevated  
privileges on the node with the  
following command:  
  
[student@wk8s-node-0] $ |  
sudo -i
```

- **A.** Explanation: Solution: `sudo -i systemctl status kubelet systemctl start kubelet systemctl enable kubelet`

**Answer:** A

## Question No. 2

Score: 7%

No configuration context  
change required for this  
task.



Ensure, however, that you have  
returned to the base node  
before starting to work on this  
task:

```
[student@mk8s-master-0] |  
$  
exit
```

## Task

Creating a snapshot of the  
given instance is expected  
to complete in seconds.



If the operation seems to hang,  
something's likely wrong with  
your command. Use **CTRL + C**  
to cancel the operation and try  
again.

Next, restore an existing, previous snapshot located at `/var/lib/backup/etcd-snapshot-previous.us.db`

The following TLS certificates/key are supplied for connecting to the server with etcdctl :

- CA certificate:  
/opt/KUIN00601/ca.crt
- Client certificate:  
/opt/KUIN00601/etcd-client.crt
- Client key:  
/opt/KUIN00601/etcd-client.key

- **A.** Explanation: Solution: #backup ETCDCTL\_API=3 etcdctl --endpoints="https://127.0.0.1:2379" --cacert=/opt/KUIN000601/ca.crt --cert=/opt/KUIN000601/etcd-client.crt --key=/opt/KUIN000601/etcd-client.key snapshot save /etc/data/etcd-snapshot.db #restore ETCDCTL\_API=3 etcdctl --endpoints="https://127.0.0.1:2379" --cacert=/opt/KUIN000601/ca.crt --cert=/opt/KUIN000601/etcd-client.crt --key=/opt/KUIN000601/etcd-client.key snapshot restore /var/lib/backup/etcd-snapshot-previous.db

**Answer:** A

### Question No. 3

Score: 7%

Set configuration context:

```
[student@node-1] $ | kube  
ctl config use-context h  
k8s
```

Task

Create a new NetworkPolicy named allow-port-from-namespace in the existing namespace echo. Ensure that the new NetworkPolicy allows Pods in namespace my-app to connect to port 9000 of Pods in namespace echo.

Further ensure that the new NetworkPolicy:

\* does not allow access to Pods, which don't listen on port 9000


\* does not allow access from Pods, which are not in namespace my-app

- **A.** Explanation: Solution: #network.yaml apiVersion: networking.k8s.io/v1 kind: NetworkPolicy metadata: name: allow-port-from-namespace namespace: internal spec: podSelector: matchLabels: { } policyTypes: - Ingress ingress: - from: - podSelector: { } ports: - protocol: TCP port: 8080 #spec.podSelector namespace pod kubectl create -f network.yaml

**Answer: A**

#### Question No. 4

Score: 5%

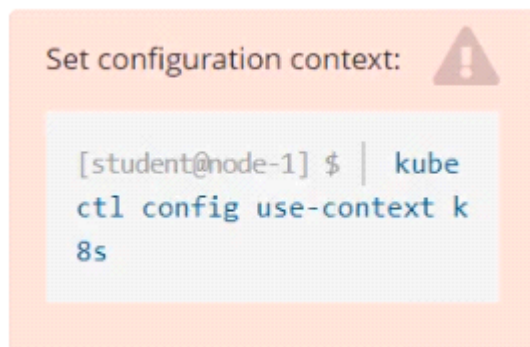

Task

Monitor the logs of pod bar and:

\* Extract log lines corresponding to error file-not-found


\* Write them to /opt/KUTR00101/bar

- **A.** Explanation: Solution: kubectl logs bar | grep 'unable-to-access-website' > /opt/KUTR00101/bar cat /opt/KUTR00101/bar

**Answer: A**

#### Question No. 5

Score: 7%

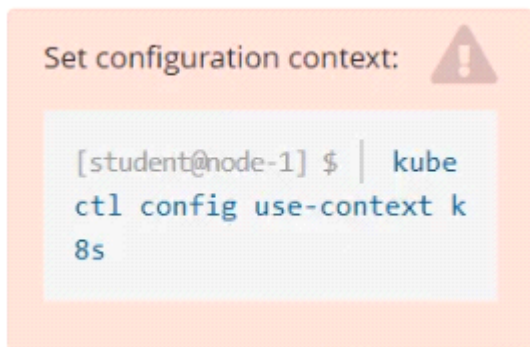

Context

An existing Pod needs to be integrated into the Kubernetes built-in logging architecture (e. g.

kubectl logs). Adding a streaming sidecar container is a good and common way to accomplish this requirement.

### Task

Add a sidecar container named sidecar, using the busybox Image, to the existing Pod big-corp-app. The new sidecar container has to run the following command:

```
/bin/sh -c tail -n+1 -f /var/log/big-corp-app.log
```

Use a Volume, mounted at /var/log, to make the log file big-corp-app.log available to the sidecar container.

Don't modify the specification of the existing container other than adding the required volume mount.

- **A.** Explanation: Solution: 

```
# kubectl get pod big-corp-app -o yaml # apiVersion: v1 kind: Pod metadata: name: big-corp-app spec: containers: - name: big-corp-app image: busybox args: - /bin/sh - -c - > i=0; while true; do echo "$(date) INFO $i" >> /var/log/big-corp-app.log; i=$((i+1)); sleep 1; done volumeMounts: - name: logs mountPath: /var/log - name: count-log-1 image: busybox args: [/bin/sh, -c, 'tail -n+1 -f /var/log/big-corp-app.log'] volumeMounts: - name: logs mountPath: /var/log volumes: - name: logs emptyDir: { } # kubectl logs big-corp-app -c count-log-1
```

**Answer: A**

**Thank You for Trying the Linux Foundation CKA Dumps PDF Demo**

**Start Your Linux Foundation CKA Exam Preparation with Actual CKA Exam Questions**

<https://www.p2pexams.com/>